





LED FLOOD LIGHT
50W SERIES

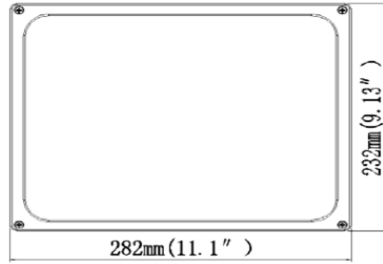

Product Code		LE-FL-50
OVERALL LAMP PARAMETERS	Input Voltage	100-277VAC 50/60Hz
	Input Current	0.18-0.50A
	Rated Wattage	50W
	Power Factor	PF≥0.95
	Luminance	>4500LM
	Luminous Efficiency	>100LM/W
	CRI	>75
	Beam Angle	60-120°
	Main Structure	Aluminum Alloy & Tempered Glas
	Surface	Baking Varnish
LED DRIVER	Output Voltage	6-12VDC
	Output Current	1.0A
	Driver Efficiency	84%
LED	LED Type	COB
	LED Quantity	1
	LED chip Manufacturer	Bridgelux
	LED Efficacy	
LIFE SPAN & ENVIRONMENT	Colour	3000-6500K
	Life Span	50000 Hrs
	Warranty	3 YEARS
	IP rating	IP65 - Suitable for wet locations
	Operating Temperature	-37°C - +55°C
Storage Temperature - Humidity	-40°C - +80°C	
SAFETY & EMC	Safety Norms	UL 1598, UL8750 UL File number: E352127
	Withstand Voltage	I/P - FG: 2121VDC
	GroundResistance	25A 100mΩ
	Electromagnetic Compatibility	EN55015
MISC.	Dimension	Pls refer to attached dimension drawing
	Net Weight	2.6Kg
	Gross Weight	3.0Kg
	Packaging Size	856*340*410mm
	Q'ty/ Carton	6PCS, 20Kg

Disclaimer:

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.